



FE130UM

Eco Line mag 300 kgs, unmonitored, Mortise mount

Description

Eco Line unmonitored magnetic lock, 300 kgf.
Mortise mounting.

Application


Medium Security applications for internal and external doors. To be mounted on the inside of an external door.

Reliable Security

This state of the art electro-magnetic locking device provides positive, instantaneous door control. Filler plates, angle brackets, and other mounting adapters are available to satisfy a wide range of door and frame types and conditions.

Safe operation

Our locking devices are inherently fail-safe, releasing instantly upon command or loss of power. With no moving parts to wear, stick or bind; no mechanical linkages to bend or break; and no bolt travel time or misalignment to raise concern, both unlocking and locking are always accomplished with ease and efficiency. As those electromagnetic locking devices function independently of any mechanical type locks, magnetic locks will not jeopardize the fire door rating of an opening.

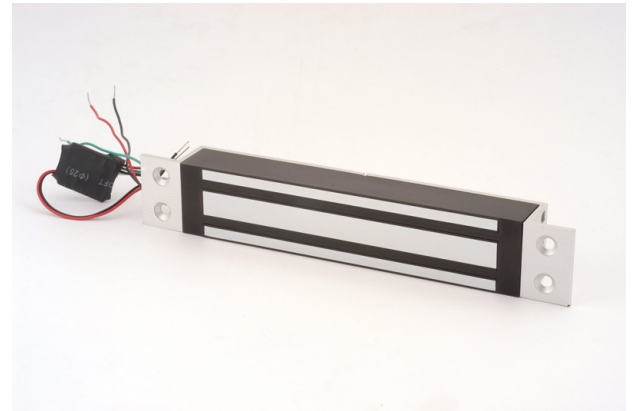

Standard Features

- 300 kgf holding power
- 12/24 V dc jumper selectable operation
- No residual magnetism
- Mortise Mounting
- Mounts easily with a minimum of tools

FE130UM

Eco Line mag 300 kgs, unmonitored, Mortise mount

Specifications

Mount	Mortise
Holding force	300 kgf
Input voltage	12/24 VDC
Current draw	440 mA (+/- 2,5% @ 13,5 V)
Dimensions (W x H x D)	228 x 38 x 27 mm
Bi colour LED	No
Door status switch	No
Monitored changeover	No
Magnetic bond sensor	No

Ordering Information

Part No.	Description
FE130UM	Eco Line mag 300 kgs, unmonitored, Mortise mount



www.gesecurity.net

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit [GE Security online](http://www.gesecurity.net) or contact your GE Security sales representative.

IPS-FE130UM-2007-08-23 09:45:09 Released : 31.01.2005;