



2 Megapixel Network IR Water-proof Dome Camera

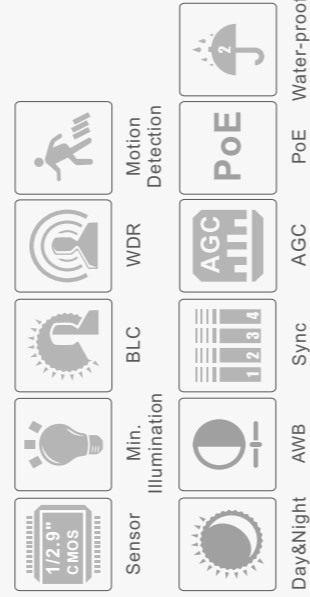

Features

- 1080P full real time coding
- Max. resolution: 1920x1080
- 20-30m IR night view distance
- 3D DNR, digital WDR, defog and image stabilization
- Corridor mode optional
- ROI coding
- Broadband audio capture up to 192KHz for providing more details to track events
- CVBS local video, one-way audio, PoE
- ICR auto switch, true day / night
- Support smart phone, iPad, remote monitoring NAT traversal

Dimensions

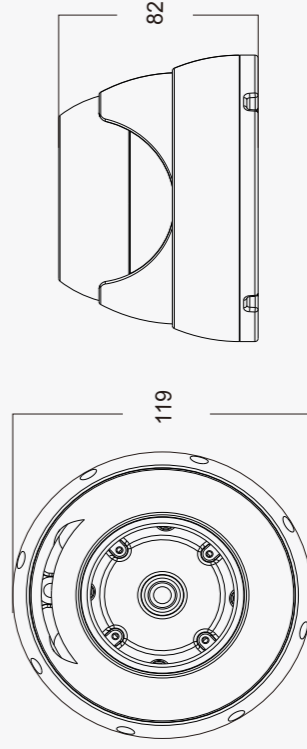

Specifications

Specifications	Model	POE-9525M-D/PE/IR2	POE-9525MV
Camera			
Image Sensor	1/2.9"CMOS		
Image Size	1920x1080		
Electronic Shutter	1/25s~1/100000s		
Min. Illumination	0LUX(IR LED ON)		
Lens	6mm(4mm,8mm optional)	3.3mm~12mm	
Lens Mount	CS	Φ14	
Wide Dynamic Range	Digital WDR		
Digital NR	3D DNR		
Image			
Video Compression	H.264		
Resolution	1080P(1920x1080), 720P(1280x720), VGA(640x480), QVGA(320x240)		
Multi-stream	1920x1080(1~30fps) / 1280x720(1~30fps) 1280x720(1~10fps) / 640x480(1~30fps) / 320x240(1~30fps)		
Bit rate	64Kbps ~ 8Mbps		
Encode Mode	VBR/CBR		
Quality	Five levels under VBR; Freely adjustable under CBR		
Image Settings	Saturation, Brightness, Contrast, etc. adjustable through client software or web browser		
Audio Compression	G711A		
Interfaces			
Network	RJ45		
Video Output	BNC×1		
Audio	One-way audio(MIC IN x1)		
Functions			
Remote Monitoring	IE browsing, CMS remote control		
Online Connection	Support simultaneous monitoring for up to 6 users ; Support multi-stream real time transmission		
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP		
Storage	Network remote storage		
Smart Alarm	Motion Alarm		
Day&Night	ICR		
PoE	Yes		
IR Distance	20-30m		
Water-proof	IP66		
Others			
Power Supply	DC12V/POE		
Power Consumption	2.2W		
IR ON	4.72W		
Operating Environment	-40°C~50°C,10% ~90% humidity		
Dimensions	Φ119mm×82mm		
Weight(net)	669g		
Weight(gross)	763g		

